



AA02/1 FIXED EXTENSION SPINDLES FOR WATER VALVES

DN40 - DN600

Fixed extension spindles provide remote valve operation where direct access to the valve is limited or below ground.


Technical Details:

Application:

Fixed Extension Spindles are used to open/close the valves from the ground level.



No	Part Name	Material
1	Hood	Ductile Iron EN-GJS-500-7
2	Spring Pin	Steel S235JR
3	Collar	Polythene PE
4	Casting Liner	Polythene PE
5	Spindle	Steel S235JR coated
6	Pipe Bell	Polythene PE
7	Coupling	Cast Iron EN-GJL-250
8	Cotter	Steel FeZn5

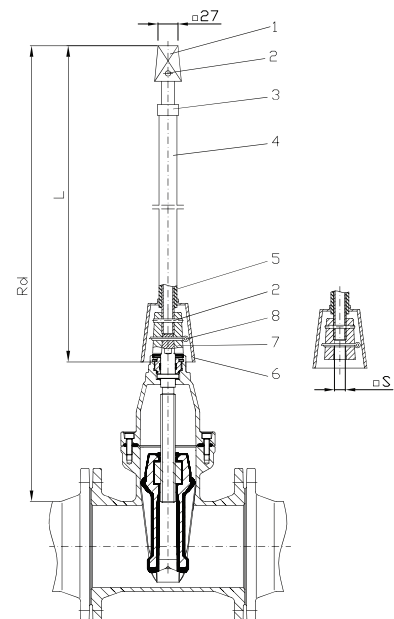

Dimension (mm & kg)

DN	Code							Weight kg							
	L [mm] 750	L [mm] 1000	L [mm] 1250	L [mm] 1500	L [mm] 2000	L [mm] 2500	L [mm] 3000	S [mm]	L [mm] 750	L [mm] 1000	L [mm] 1250	L [mm] 1500	L [mm] 2000	L [mm] 2500	L [mm] 3000
40-50	AA1236	AA1237	AA1238	AA1239	AA1240	AA1241	AA1275	14	3,0	4,0	4,5	5,2	6,0	7,0	7,2
65-80	AA1242	AA1243	AA1244	AA1245	AA1246	AA1247	AA1276	17	3,0	4,0	4,5	5,3	6,0	7,0	7,2
100-150	AA1248	AA1249	AA1250	AA1251	AA1252	AA1253	AA1277	19	3,0	4,0	4,5	5,3	6,0	7,0	7,2
200	AA1254	AA1255	AA1256	AA1257	AA1258	AA1259	AA1278	24	3,5	4,5	5,0	6,0	6,5	8,0	7,5
250-300	AA1260	AA1261	AA1262	AA1263	AA1264	AA1265	AA1279	27	3,5	4,5	5,0	6,0	6,5	8,0	7,5
250-300	AA1266	AA1267	AA1268	AA1269	AA1270	AA1271	AA1280	29	On request						

Other lengths available on request.

