



TELESCOPIC EXTENSION SPINDLES

DN40 - DN600

Telescopic spindles allow adjustable remote operation of underground valves, accommodating different installation depths.


Technical Details:

Application:

Fixed Extension Spindles are used to open/close the valves from the ground level.



No	Part Name	Material
1	Hood	Ductile Iron EN-GJS-500-7
2	Spring Pin	Steel S235JR
3	Collar	Polythene PE
4	Casting Liner	Polythene PE
5	Spindle	Steel S235JR coated
6	Pipe Bell	Polythene PE
7	Coupling	Cast Iron EN-GJL-250
8	Locking Clutch	Steel S235JR
9	Cotter	Steel FeZn5

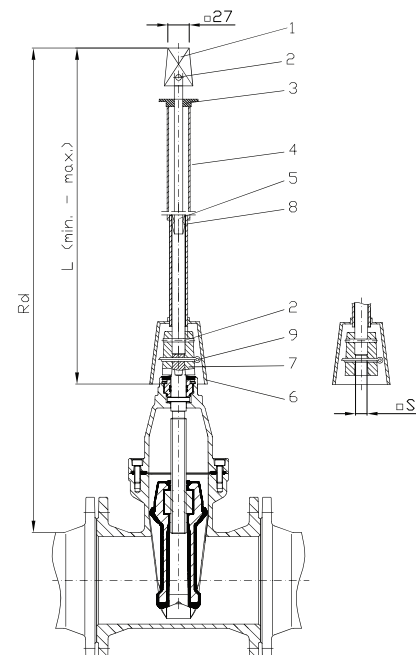

DN	Code				Weight kg				
	L [mm] 550/800	L [mm] 800/1200	L [mm] 1000/1650	L [mm] 1600/2500	S [mm]	L [mm] 550/800	L [mm] 800/1200	L [mm] 1000/1650	L [mm] 1600/2500
20-50	AA1056	AA1057	AA1058	AA1060	14	3.0	4.0	4.5	6.0
65-80	AA1062	AA1063	AA1064	AA1066	17	3.0	4.0	4.5	6.0
100-150	AA1068	AA1069	AA1070	AA1072	19	3.0	4.0	4.5	6.0
200	AA1074	AA1075	AA1076	AA1078	24	3.5	4.5	5.0	6.5
250-300	AA1080	AA1081	AA1082	AA1084	27	3.5	4.5	5.0	6.5

Other lengths available on request.

