



RADIUS
AEON

AA01/1 **TELESCOPIC EXTENSION SPINDLE FOR SERVICE VALVE**

DN40 - DN600

Telescopic Extension Spindles are used to open/close the valves from ground level.

Application:



Design features

- Pipe Bell to protect the pin against dirt.
- Possibility of making a galvanized version
- Possibility of making a casing with a mounting depth according to the order.



Technical Details:

Coating:

Black bituminous paint


FeZn5 galvanized - optional





Surface box - height 150 mm

Rd - distance from the base of the pipeline to the ground level
L - actual length of the telescopic extension spindle

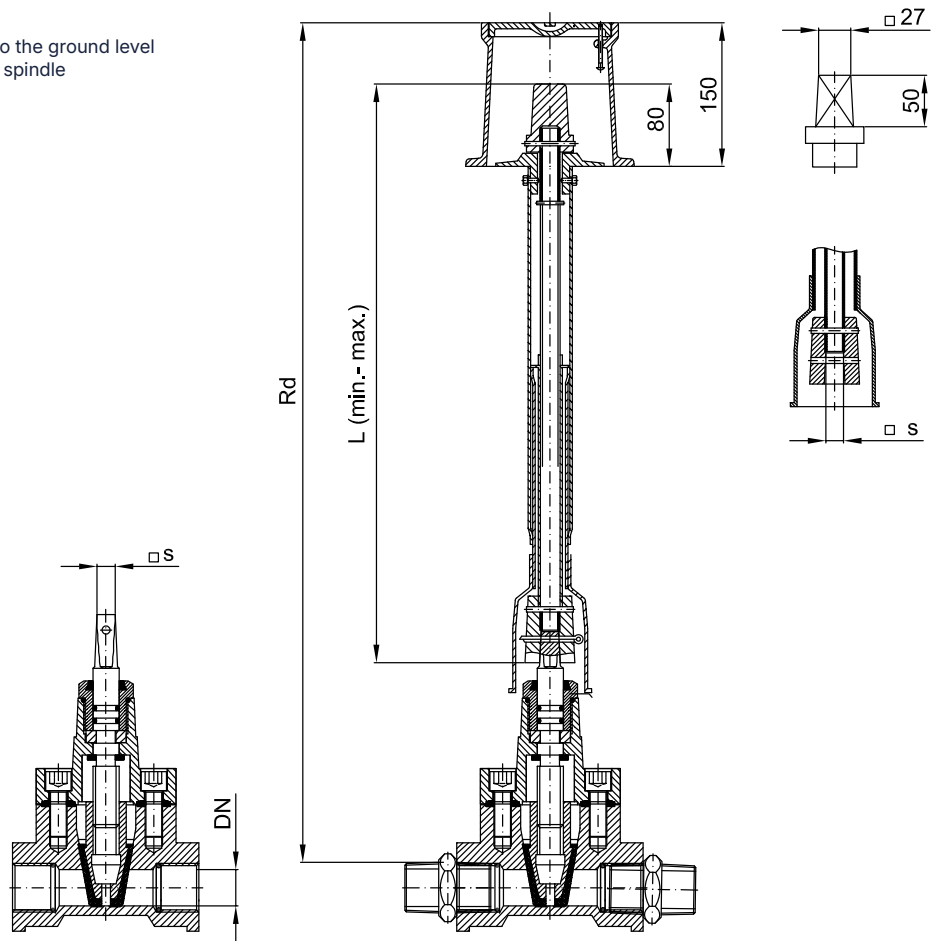

Dimension (mm & kg)

DN	Stem Top Square □ S	L 550/800		Code	L 1000/1200		Code	L 1000/1650		Code	L 1400/2000		Code
		Rd min	max		Rd min	max		Rd min	max		Rd min	max	
20	14	750	1000	AA1056	1000	1400	AA1057	1200	1850	AA1058	1600	2400	AA1059
25	14	757	1007	AA1056	1007	1407	AA1057	1207	1857	AA1058	1607	2407	AA1059
32	14	755	1005	AA1056	1005	1405	AA1057	1205	1855	AA1058	1605	2405	AA1059
40	14	790	1040	AA1056	1040	1440	AA1057	1240	1890	AA1058	1640	2440	AA1059
50	14	795	1045	AA1056	1045	1445	AA1057	1245	1895	AA1058	1645	2445	AA1059

Please use the product codes when placing your order.