

AF02

DRY BARREL FIRE HYDRANT SMART DN150 PN16

AF02-250W-01, 3 - 7"

Designed for reliable fire-water access with freeze protection, durable construction, and efficient operation in outdoor fire protection systems.

Application:



Fire Protection



Technical Details

Maximum Working Pressure PFA:
250 PSI / 17 bar

Working temperature:
42 °F to 180 °F (6 °C to 82 °C)

Construction complies to:
Complies with AWWA C502

Certification:
UL Listed and FM Approved

Connection:
Inlet: DN150 (6") Flanged EN 1092-2 PN16 or ANSI B16.5 Class150
Outlets: joint Storz 1×125 (5") and 2×75(2½ ")


Coating:
300 µm FBE coating or spray paint, external and internal red spray epoxy, RAL 3000 in accordance with AWWA C550, bottom tube protected with bitumen coating (black)





AF02

No	Part Name	Material - ASTM Specification
1	Flange Connector	Ductile Iron EN-GJS-500-7
2	Locking Nut	Ductile Iron EN-GJS-500-7
3	Connecting Rod	Steel 1045
4	Locking Nut Gasket	Elastomer EPDM
5	Tray	Ductile Iron EN-GJS-500-7
6	Sealed Rubber Sheet	Elastomer EPDM
7	Drain Hole Spring	Stainless Steel AISI 316
8	Connecting Cylinder	Ductile Iron EN-GJS-500-7
9	Perforated Cylindrical Pin	Steel 1045
10	Connecting Rod Sleeve	Steel 1045
11	Clamp for Connection Tube	Ductile Iron EN-GJS-500-7
12	Main Body on Ground	Ductile Iron EN-GJS-500-7
13	65 Connector	C95400
14	65 Cover Gasket	Elastomer EPDM
15	65 Cover	Ductile Iron EN-GJS-500-7
16	Upper End Cover	Ductile Iron EN-GJS-500-7
17	Thread Plug	C95400
18	Screw Stem Nut	C95400
19	Screw Nut Gasket	C95400
20	Screw Nut Seat	C95400
21	Bolt, Nut	Steel 1035
22	100 Cover	Ductile Iron EN-GJS-500-7
23	Cylindrical Pin	Steel 1045
24	Cover Chain	Gr.B ASTM A283-B
25	Bolt, Nut	Steel 1035
26	Screw Stem	Steel 1045
27	Screw Stem Bushing	Stainless Steel AISI 304
28	Drain Hole Cover	C95400 + EPDM
29	Seat	C95400
30	Bolt, Nut	Stainless Steel AISI 304
31	Seat Fixing Plate	Ductile Iron EN-GJS-500-7
32	Bolt, Nut	Steel 1035
33	Annular Tubes	Steel 1045
34	Platen	Ductile Iron EN-GJS-500-7
35	Locking Nut Seat	Ductile Iron EN-GJS-500-7
36	Bolt	Stainless Steel AISI 304
37	100 Connector	C95400
38	100 Cover Gasket	Elastomer EPDM

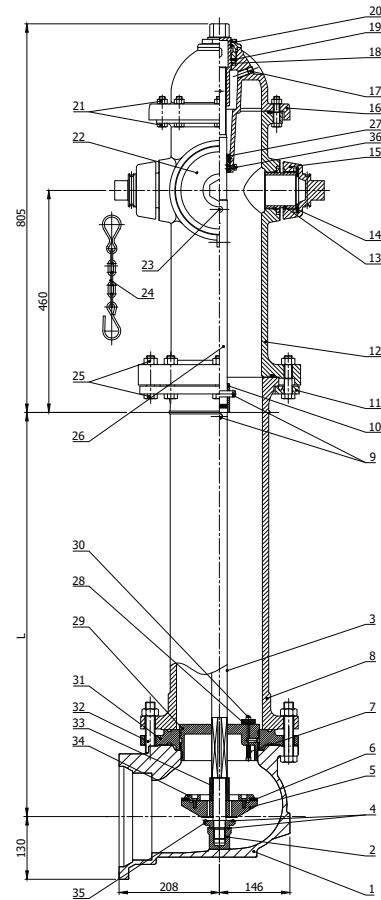

Dimension (mm & kg)

Size		50/2"								
AF02-250W-01	EN 1092-2 PN16	AM0534	AM0535	AM0536	AM0537	AM0538	AM0539	AM0540	AM0541	AM0542
	ANSI Class150	AM0544	AM0545	AM0546	AM0547	AM0548	AM0549	AM0550	AM0551	AM0552
L	[inch]	3'	3'5"	4'	4'5"	5'	5'5"	6'	6'5"	7'
	[mm]	911	1063	1215	1368	1520	1673	1825	1978	2130
Weight (kg)		161	179	196	203	210	225	240	255	265