



RADIUS
AEON

BG01/1

RESILIENT SEATED GATE VALVE OPTIVALVE PLUS™ FLANGED END F4

DN80 - DN300

Patented dual seal technology, the optimal Resilient Seated Gate Valve provides perfect seal tightness with low torque, minimal number of turns, and full traceability.

Application:



Gas & Biogas and Natural gas lines at medium working pressure and temperature range from -20° to +60°C

Design features

- Patented double seated integral ductile iron wedge, fully NBR encapsulated
- Very low closing torque with perfectly smooth patented guiding
- Stem seals fully replaceable under pressure
- Patented primary seal integrated in the wedge to achieve perfect top seal when valve is opened
- The design is approved for use with hydrogen and a mixture of hydrogen and natural gas up to a working pressure 7 bar

Technical Details

Face to Face in accordance to:
EN 558-1 Series 14

Certification:
CE (PED 2014/68/UE), DVGW, BSI Kitemark, TSG

Maximum Operating Pressure MOP:
16 bar / PN16
(7 bar for double-block-and-bleed - optional)
7 bar when used with Hydrogen gas

Flange Type:
EN 1092-2 PN10 & PN16

Working temperature:
-20 to +60°C

Coating:
250 µm FBE coating, external and internal
PUR available on request:
Internally - 250 µm FBE coating
Externally - polyurethane (PUR) to EN 10290


Construction complies to:
EN 13774 Class 1/2, DIN 3230-5 PG2 or PG3,
GIS/V7-1 Class A/B, TSG D7002-2023





BG01/1

No	Part Name	Material
1	Body	Ductile Iron EN-GJS-500-7
2	Bonnet	Ductile Iron EN-GJS-500-7
3	Gland Housing	Ductile Iron EN-GJS-500-7
4	Wedge	D.I., NBR encapsulated EN-GJS-400-18/ EN-GJS-500-7
5	Wedge Nut	Aluminium Bronze
6	Guide Shoe	Plastic POM
7	Stem	Stainless Steel X20Cr13 / 1.4021 / 420
8	Gland Bush	Aluminium Bronze
9	Support Bush	Aluminium Bronze
10	Bonnet Gasket	Elastomer NBR
11	O-ring Seal	Elastomer NBR
12	Dust Seal	Elastomer NBR
13	Bonnet Screws	Stainless Steel A2-70
14	Housing Bolts	Stainless Steel A2-70

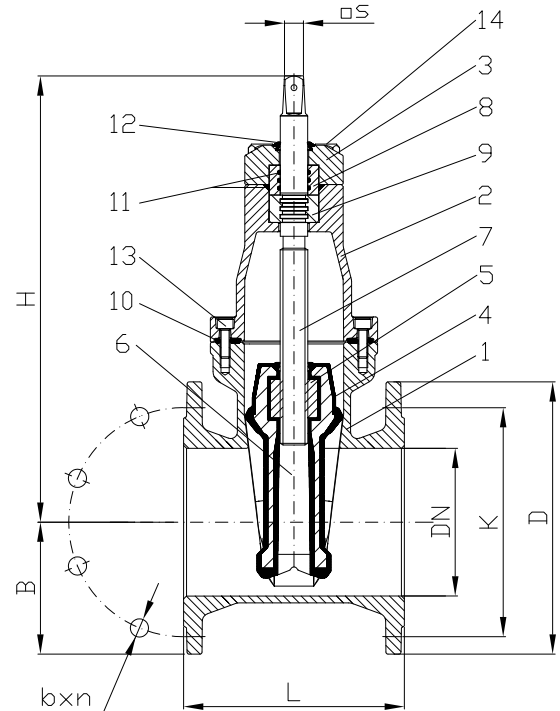

Notes:
- Lifting eye-bolts standard from DN125

Dimension (mm & kg)

DN		80	100	125	150	200	250	300
BG01/1	EPOXY POWDER COATING							
	PN16	BG0848	BG1048	BG1268	BG1548	BG2048	BG2548	BG3048
	PN10					BG2047	BG2547	BG3047
	POWDER COATING WITH EPOXY PAINT AND ADDITIONAL LAYER OF POLYURETHANE (PUR) - BLACK							
	PN16	BG0845	BG1045	BG1245	BG1545	BG2045	BG2545	BG3045
	PN10					BG2044	BG2544	BG3044
L		180	190	200	210	230	250	270
H		315	349	465	454	556	646	727
B		95	102	120	134	165	196	225
K PN16 / PN10		160	180	210	240	295	355 / 350	410 / 400
b x n PN16 / PN10		19×8	19×8	19×8	23×8	23×12 / 23×8	27×12 / 23×12	27×12 / 23×12
D		200	220	250	285	340	405	460
Stem Top Square □S		17	19	19	19	24	27	27
Turns to open/close		7 ½	9 ¼	13 ¾	13 ¾	18	21 ¾	26 ⅓
Closing Torque [Nm]		70±10	80±10	100±20	100±20	130±20	180±20	200±20
Weight		20,3	23,3	41,2	43	68,4	89,3	136

Notes:
- Clockwise to close