



AW45/1 **DOUBLE FLANGE BENDS TYPE N**

DN80 - DN100

Surface Boxes are designed for building in paths, roadway or non-surfaced roads to allow access to valves installed underground.

Application:



Design features

- Double flange bends type N according EN 545



Technical Details:

Maximum Working Pressure PFA:
10 bar / PN10 lub 16 bar / PN16

Certification:
Hygienic Certificate PZH

Construction complies to:
EN 545

Flange Type:
EN 1092-2 PN10 & PN16
(other flange types available on request)


Coating:
250 µm FBE coating, external and internal





AW45/1

No	Part Name	Material
1	Body	Ductile Iron EN-GJS-500-7

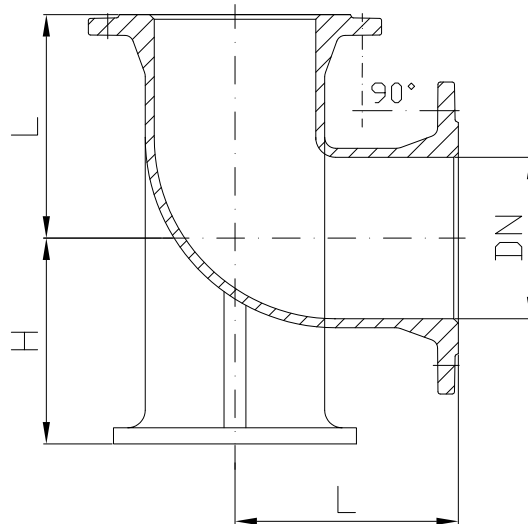

Dimension (mm & kg)

DN	DN80	DN80
AW45/1	AF0302	AF0302
L	165	180
H	110	125
Weight	13	17