



AW39/2 **FLANGE ADAPTOR FOR PVC/PE PIPE**

DN50 - DN300 (EPDM)

Flange Adaptor For PVC/PE Pipe connection flanged fittings to PCV and PE pipe lines.



Application:



Potable Water, Irrigation, District heating & cooling, Sewerage and Storm Water

Design features

- Drinking water approved EPDM gasket.

Technical Details:

Maximum Working Pressure PFA:
16 bar / PN16

Flange Type:
EN 1092-2 PN10 & PN16

Working temperature:
Maximum +90°C

Coating:
300 µm FBE coating, external and internal


Suitable:
Connecting fitting to UPVC and PE pipe line.





AW39/2

No	Part Name	Material
1	Body	Ductile Iron EN-GJS-500-7
2	Lip Seal	Elastomer EPDM
3	Spacer Bush	PE
4	Grip Ring	Brass Ms58
5	Lock Ring	Ductile Iron EN-GJS-500-7
6	Bolt	Stainless Steel X2CrNiMo17-13-2 / 1.4404 / 316L
7	Washer	Stainless Steel X2CrNiMo17-13-2 / 1.4404 / 316L

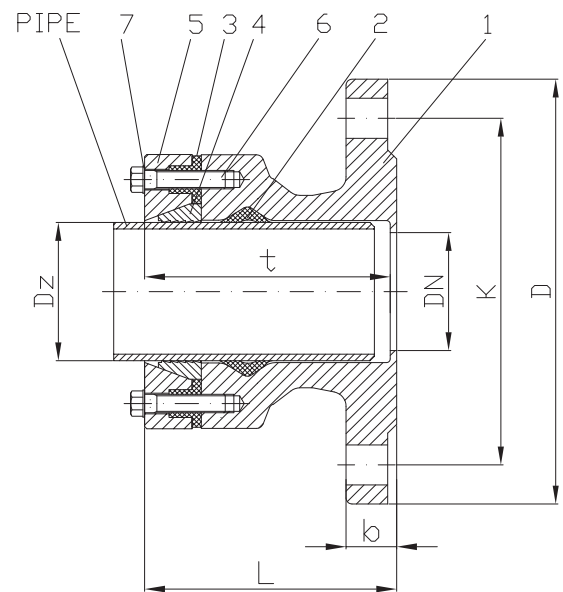

Dimension (mm & kg)

AW39/2	EPDM		Dz [mm]	D [mm]	K [mm]	L [mm]	t [mm]	b [mm]	Weight kg
DN	PN10	PN16							
50	AH0612		63	165	125	90	80	19	3,6
60	AH0613		75	175	145	92	82	19	4,0
80	AH0614		90	200	160	95	85	19	5,5
100	AH0615		110	220	180	95	85	19	6,2
100	AH0616		125	220	180	97	87	19	7,0
125	AH0617		125	250	210	97	87	19	8,2
150	AH0618		160	285	240	115	105	19	10,5
150	AH0619		180	285	240	125	115	19	11,6
200	AH0625	AH0620	200	340	295	135	125	20	18,0
200	AH0626	AH0621	225	340	295	138	128	20	16,0
250	AH0627	AH0622	250	400	350 / 355	155	145	22	22,0
250	AH0628	AH0623	280	400	350 / 355	158	148	22	29,0
300	AH0629	AH0624	315	455	400 / 410	185	175	24,5	44,0

* Other sizes available on request.