

RADIUS
AEON

AA02/2

FIXED EXTENSION SPINDLES FOR GAS VALVES

DN40 - DN600

Fixed Extension Spindles are used to open/close the valves from ground level.

Application:



Design features

- Pipe Bell to protect the pin against dirt.
- Possibility of making a galvanized version
- Possibility of making a casing with a mounting depth according to the order.



Technical Details:


Coating:

Black bituminous paint
FeZn5 galvanized - optional



AA02/2

No	Part Name	Material
1	Hood	Ductile Iron EN-GJS-500-7
2	Spring Pin	Steel FeZn5
3	Collar	Polyethylene PE
4	Casting Liner	Polyethylene PE
5	Spindle	Steel profile S235JR / galvanized steel profile
6	Pipe Bell	Polyethylene PE
7	Coupling	Gray Cast Iron EN-GJL-250 optional Ductile Iron EN-GJS-500-7
8	Cotter Pin	Steel FeZn5 / Stainless Steel

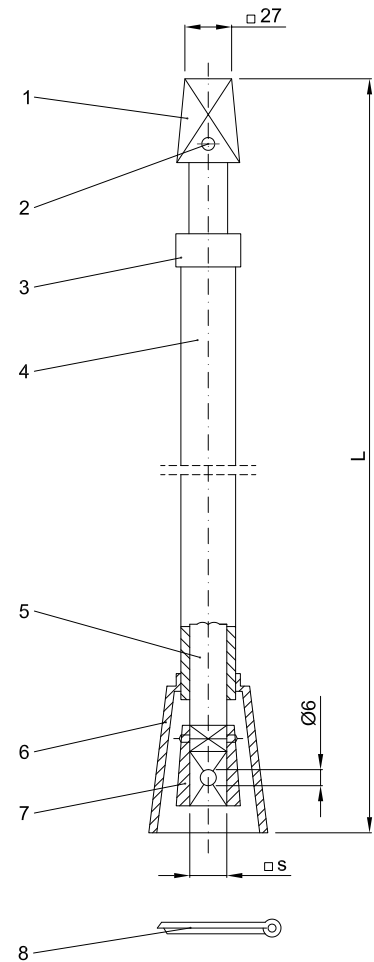

Dimension (mm & kg)

Stem Top Square □S	Weight					
	L 700	L 1000	L 1250	L 1500	L 2000	L 2500
14	3,0	3,1	3,3	3,6	4,1	4,7
17	3,0	3,1	3,2	3,6	4,1	4,7
19	3,0	3,1	3,3	3,7	4,1	4,7
24	4,0	4,1	4,3	4,7	5,3	6,0
27	6,0	6,1	6,3	6,7	6,3	7,0
32	7,4	7,5	7,8	8,2	8,8	9,5

Product catalog codes

DN	L 700	L 1000	L 1250	L 1500	L 2000	L 2500
20-50	AA1236	AA1237	AA1238	AA1239	AA1240	AA1241
65-80	AA1242	AA1243	AA1244	AA1245	AA1246	AA1247
100-150	AA1248	AA1249	AA1250	AA1251	AA1252	AA1253
200	AA1254	AA1255	AA1256	AA1257	AA1258	AA1259
250-450	AA1260	AA1261	AA1262	AA1263	AA1264	AA1265
500-600	AA1340	AA1341	AA1342	AA1343	AA1344	AA1345

Please use the product codes when placing your order.